

multisio

1D2-4CI



**Current measuring
module**



KBR GmbH
Am Kieferschlag 7
D-91126 Schwabach

T +49 (0) 9122 6373-0
F +49 (0) 9122 6373-83
E info@kbr.de

www.kbr.de

Table of Contents

| | | |
|---|---|---|
| 1 | Function description current measuring module multio 1D2-4CI .. | 2 |
| 2 | Current measuring module - connection chart | 2 |
| 3 | Current measurement module LED display | 3 |
| 4 | Function of scan button | 3 |
| 5 | Technical data | 4 |

1 Function description current measuring module multisio 1D2-4CI

The hardware of the **multisio 1D2-4CI** is equipped with 4 analogous current measuring inputs. Currents of up to 6A can be measured. The device LED displays different device states by flashing or continuous illumination.

The multisio 1D2-4CI digitizes the 4 currents and calculates the frequency, RMS value and harmonics up to the 19th harmonic independently. Since the voltage is not measured, power values cannot be determined. Scanning can be performed at a set frequency or variably (30 to 70Hz).

The module can be accessed by a master device (multisio xD6 (from 5D6-ESBS-5DI6RO1DO) with module bus, multicomp with module bus or via computer with VE via Multigate ES/BS) using the module bus interface. The master device has to configure the module and read out the data acquired by the module for further processing.

The operating voltage is supplied via the module bus interface. The module cannot be used as a stand-alone unit.



Caution!

The multisio 1D2-4CI may only be used with series-connected current transformers!

The transformers may not be grounded secondarily.

Up to the 690V network (phase to phase voltage), the connected current transformers have to be designed for a test voltage of at least 2500VAC for 1 minute.

2 Current measuring module - connection chart

Terminal assignment


Upper terminal row:

Terminal 20: Current input k1
 Terminal 21: Current input I1
 Terminal 22: Current input k2
 Terminal 23: Current input I2

Lower terminal row:

Terminal 24: Current input k3
 Terminal 25: Current input I3
 Terminal 26: Current input k4
 Terminal 27: Current input I4

IN / OUT: Module bus / supply voltage

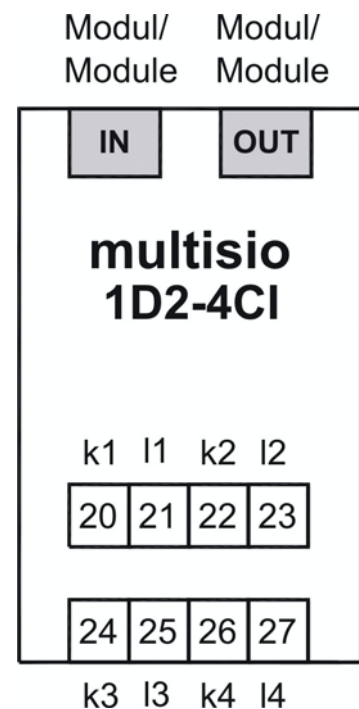



Note


Connect the current transformers according to the terminal numbers, i.e. transformer 1 to terminal 20/21, transformer 2 to terminal 22/23 etc.!

The current inputs of the module are not galvanically separated!

3 Current measurement module LED display

In KBR eBUS scanning mode, the power LED is flashing quickly, in the module detection mode. In normal operation, the LED is illuminated constantly.

Power LED: Operating voltage




4 Function of scan button



Note

If the scan button is pressed briefly (until all LEDs light up for a short time), the module enters the scanning mode.

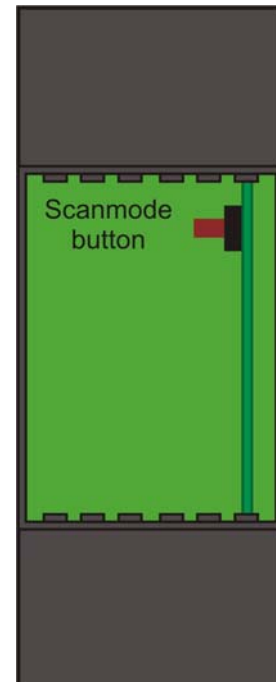

5 Technical data

| | | |
|-------------------------------------|-------------------------------|---|
| Power supply: | Via module bus | 24VDC / ca. 1.3W |
| | Connection | Modular connector RJ12:6P6C |
| Hardware inputs: | | |
| 4 current measuring inputs | Measuring range | 0 to 6A AC |
| | Plug terminal 2x 4-pole | Permissible width of connection lines 2.5 mm ² |
| Measurement current input: | Fuse protection | NONE!!! |
| | | Always short out the current transformer terminals k and l before opening the circuit! |
| Module bus interface: | Serial port | RS485 |
| | Module bus connection | RJ12 for ready-made KBR system cable, max. length 30 m when placed accordingly |
| | Transfer rate | 38400 Bps |
| | Bus protocol | KBR module bus |
| Display: | LED | 1x Operation display / status display |
| Control unit | Button | Scan button (module bus) |
| Mechanical data: | | |
| Top hat rail device | Housing dimensions | 90 x 36 x 61 mm (H x W x D) |
| | Mounting type | Wall mounting on DIN rail, 7.5 mm deep, in accordance with DIN EN 50022. |
| | Weight | approx. 100g |
| Standards and miscellaneous: | | |
| Environmental conditions | Standards | DIN EN 60721-3-3/A2: 1997-07; 3K5+3Z11; (IEC721-3-3; 3K5+3Z11) |
| | Operating temperature | -5°C ... +55°; |
| | Humidity | 5% ... 95%, non-condensing |
| | Storage temperature | -25°C ... +70°C; |
| Electrical safety | Standards | DIN EN 61010-1/A2: 2001 + B1: 2002-11 + B2: 2004-1; (IEC1010-1/A2) |
| | Protection type | IP20 in accordance with DIN EN 40050 part 9:1993-05 |
| | Electromagnetic compatibility | DIN EN 61000-6-3: 2001 + A11: 2004; (IEC61000-6-3) DIN EN 61000-6-2: 2001 (IEC61000-6-2) |

